

Direct-View LED Traffic Controller

TCL217RAG-226 Traffic Signal

ILLUMINATION SOURCE

Super bright, wide viewing angle LED's
Also available in Green, Red, Blue, or Amber LED's
Long life; Up to 100,000+hours



ELECTRICAL

Integrated solid state power supply
120 VAC Standard; Optional Voltages 12 VDC to 277 VAC
RED 0.03 Amps Maximum; AMBER 0.02 Amps Maximum; GREEN 0.02 Amps Maximum
UL / CUL Approved for Wet Location

CONSTRUCTION


Cabinet - Slim Line single piece extruded aluminum housing
Back plate - 0.050" Aluminum with two 7/8" diameter knockouts for electrical connections and four 3/8" knockouts for wall mounting.
Lens Material - Impact resistant tinted polycarbonate

FINISH

Cabinet - Standard Duranodic Bronze
Custom colors available upon request

INSTALLATION

Lift 'n Shift wall mounted back plate bolts to wall surface; unit hinges on back plate allowing easy electrical connection without holding sign. Back is secured to cabinet frame using two screws to complete installation.

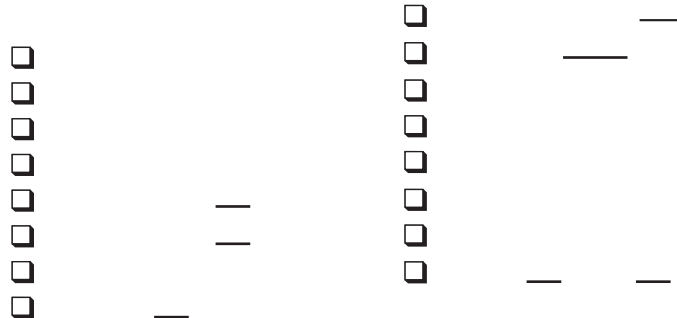

Product View



MODEL NUMBER

TCL217RAG-226

CABINET DIMENSIONS

21" H x 7" L x 2.5" D

LENS DIAMETER

5 Inches

MESSAGE

Traffic Signal

MESSAGE COLOR

Red / Amber / Green

LIGHT SOURCE

Direct-View LED